



BASE SECTOR ANTENNA

WiBOX SA 5-90-14V

WiBOX SA 5-90-14V is a **sector antenna (SISO)** operating at the frequency band of: **5.3 – 6.0 GHz** with **14 dBi** gain, in **horizontal** polarization. The antenna can be used in **point-to-multipoint (PMP)** topology for covering small and medium size areas or as the **hotspot in schools, halls, stadiums or another public places**. It can work **indoor and outdoor (IP 67)**. It works with the systems of: **WLAN (802.11a), Bluetooth, ISM, RFID**. The antenna is integrated with the top quality **WiBOX Medium** box system.

ROHS



Electrical specification

Frequency	5.3 - 6 GHz
Gain	14 dBi
VSWR	<2.00
Beamwidth	16°/90°
Polarization	V
Cross-Polar Isolation	
Front-to-Back	
Separation between Connectors	
Impedance	50 Ω
Max Input Power	50 W
Lighting Protection	No
DC Ground	Yes

Mechanic specification

Dimensions	27.2 x 27.6 x 9.6 cm 10.71 x 10.87 x 3.78 inch
Weight	1.5 kg
Connector	RJ45
Material	ABS
Waterproof level	IP67
Operating temperature	from -40°C to 80°C from -40°F to 176°F
Wind resistance	70km/h

Mounting Kit

Dimensions	9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch
Regulation Range	+/- 30°
Weight	0.87 kg
Mast Dimensions Range	25 - 65mm
Material	Polyamide with fiberglass + galvanized steel U-Bolts

Features

- › Gain for the frequency of 5300 - 6000 MHz 0x 14 dBi
- › Polarization V for the frequency of 5300 - 6000 MHz
- › 0 x Connector SMA
- › Big, ergonomic and voluminous **WiBOX Medium** enclosure for radio equipment installation
- › Outdoor Waterproof Enclosure **WiBOX Medium**
- › Designed and resistant for any weather conditions
- › RJ45 Waterproof System
- › Grounding system protecting against lightning - DC Ground
- › 36 Warranty Months


Systems

- › LTE band - 46, 47, 255
- › WLAN - 5 GHz
- › WiMAX - 5 GHz
- › RFID - 5725 - 5875 MHz
- › ISM - 5725-5875 MHz

Applications

- › Stadiums, Public Places
- › Hotspot
- › PtM Connections
- › System Integration

Plots

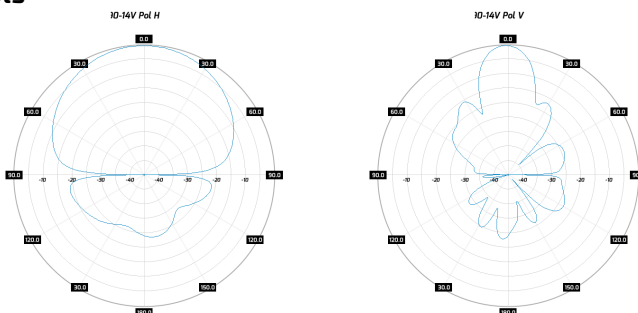

Radiation pattern WiBOX SA 5-90-14V Pol H Radiation pattern WiBOX SA 5-90-14V Pol V