



BASE SECTOR ANTENNA

WiBOX SA 24-90-12H

WiBOX SA 24-90-12H is a sector antenna (SISO) operating at the frequency band of: 2.4 – 2.5 GHz with 12 dBi gain, in horizontal polarization. The antenna can be used in point-to-multipoint (PMP) topology for covering small and medium size areas or as the hotspot in schools, halls, stadiums or another public places. It can work indoor and outdoor (IP 67). It works with the systems of: WLAN (802.11b/g), Bluetooth, ISM, RFID. The antenna is integrated with the top quality WiBOX Medium box system.

ROHS



Electrical specification

| | |
|-------------------------------|---------------|
| Frequency | 2.4 - 2.5 GHz |
| Gain | 12 dBi |
| VSWR | <2.00 |
| Beamwidth | 30°/90° |
| Polarization | H |
| Cross-Polar Isolation | |
| Front-to-Back | |
| Separation between Connectors | |
| Impedance | 50 Ω |
| Max Input Power | 50 W |
| Lighting Protection | No |
| DC Ground | Yes |

Mechanic specification

| | |
|-----------------------|---|
| Dimensions | 27.2 x 27.6 x 9.6 cm 10.71 x 10.87 x 3.78 inch |
| Weight | 1.4 kg |
| Connector | RJ45 |
| Material | ABS |
| Waterproof level | IP67 |
| Operating temperature | from -40°C to 80°C from -40°F to 176°F |
| Wind resistance | 70km/h |

Mounting Kit

| | |
|-----------------------|---|
| Dimensions | 9.9 x 10.5 x 14.8 cm 3.9 x 4.13 x 5.83 inch |
| Regulation Range | +/- 30° |
| Weight | 0.87 kg |
| Mast Dimensions Range | 25 - 65mm |
| Material | Polyamide with fiberglass + galvanized steel U-Bolts |

Features

- › Gain for the frequency of 2400 - 2500 MHz 0x 12 dBi
- › Polarization H for the frequency of 2400 - 2500 MHz
- › 0 x Connector SMA
- › Big, ergonomic and voluminous **WiBOX Medium** enclosure for radio equipment installation
- › Outdoor Waterproof Enclosure **WiBOX Medium**
- › Designed and resistant for any weather conditions
- › RJ45 Waterproof System
- › Grounding system protecting against lightning - DC Ground
- › 36 Warranty Months


Systems

- › LTE band - 40, 41
- › WLAN - 2.4 GHz
- › WiMAX - 2.3 GHz, 2.5 GHz
- › RFID - 2400 - 2483 MHz
- › Bluetooth - 2400-2483 MHz
- › ISM - 2400-2483 MHz

Applications

- › Stadiums, Public Places
- › Hotspot
- › PtM Connections
- › System Integration

Plots

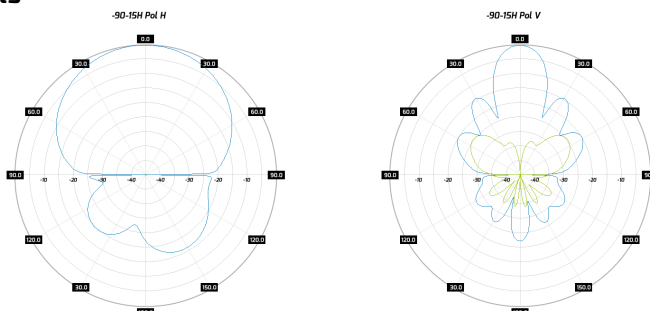

Radiation pattern WiBOX SA 24-90-15H Pol H Radiation pattern WiBOX SA 24-90-15H Pol V